# FC1400



## WiFi Video Intercom

Relay outputs

2

Camera:

Color 640x480

TECHNICAL SPECIFICATIONS

Enclosure





- Simple setup by mobile phone
- Connect to the intercom directly through your phone's Wi-Fi, enter the pass code for the home hub Wi-Fi and the device is connected
- View the gate/door and open any time with monitoring mode
- Full duplex speech
- 2 relay output
- Latching outputs for hold open.
- CAT5 terminal port for easy hard wire option
- Upgraded camera with IR cut filter for better color by day and IR night vision by night

BS316 marine grade SS construction with gloss black face trim

- Stores images of the last 32 missed callers on your phone
- High gain waterproof Wi-Fi antenna for extended range
- Still works locally on Wi-Fi network even if broadband goes down

App name	WIFI PRO 2
Power supply	24v dc (adaptor included)
Power consumption	80mA standby - 300mA during call
Relay outputs	2
Keypad option	Yes
Keypad codes	1200
Keypad relays	3
Relay type	N/C and N/O contacts
Relay load	2A - 24v AC max
Relay time	Adjustable 1-10 seconds
Audio	Full 2 way Duplex and half Duplex sound options
Wi-Fi standard	802.11b/g/n
Wi-Fi antenna	Directional 60°; Waterproof for outdoor use
Security	6 digit passcode protected
Uplink bandwidth	110K bits/sec
Camera	Color; 110 degree, 640x480 pixel
Night vision	Yes, by infrared illumination (with IR cut filter)
Operating ambient temperature	-22°F - 110°F (-30°C - +50°C)
Weight	4.7 lb (2.1 kg)
Dimensions (L x D x H)	9. x 7 x 3.5 in (229 x 180 x 90 mm)
Protection class	IP 55


#### **FEATURES**



Google<sup>™</sup>
PUSH alerts
on Apple
and Android
devicess

lcon based\_ layout



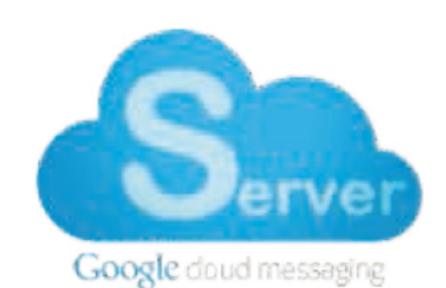











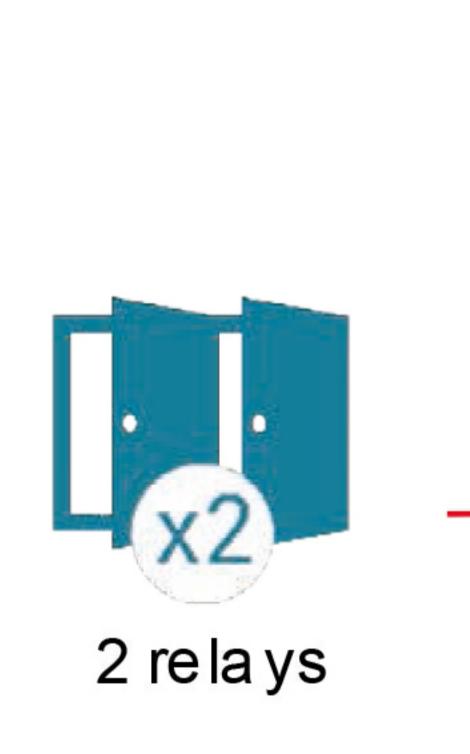

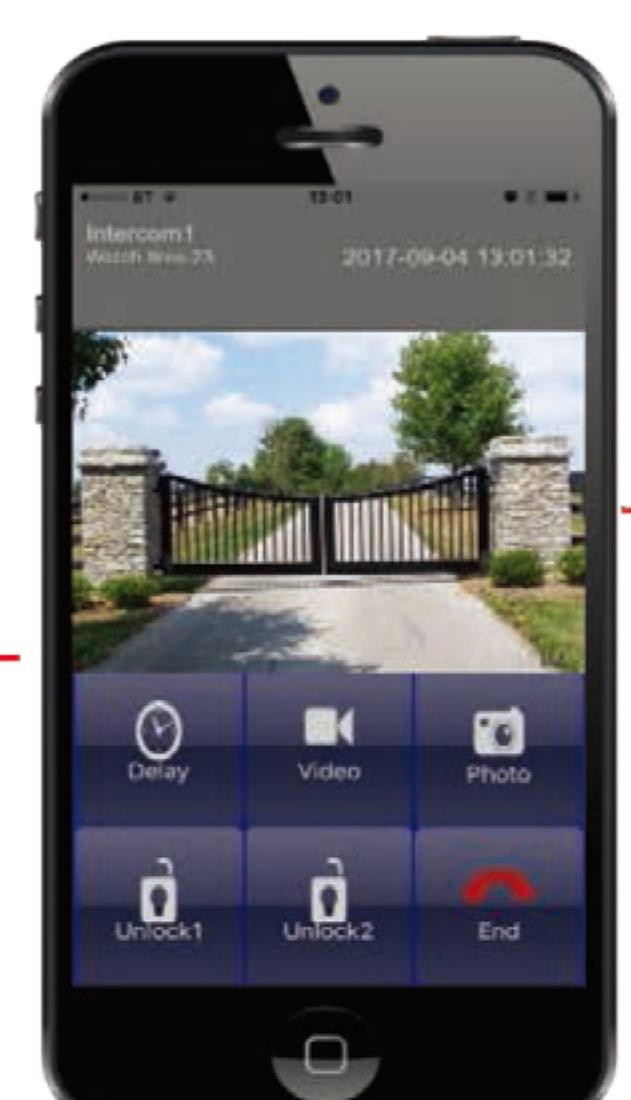



Full 2 way Duplex and half Duplex sound options!

Camera with IRcut filter for better color by day and better IR night vision by night

### **MODEL NUMBER**

ModelPart No.Wi-Fi Intercom with video4402

#### **DIMENSIONS (INCHES)**

