# FCI4000 **Cellular Intercom**

# FAAC

## dial out numbers

4

## caller ID numbers

100




- · Calls your home phone and mobiles on roll-over when visitor presses the call button
- Open your gates from your phone
- Free home owner app to trigger gates, set up auto opening and closing times, create new access codes, receive notifications on entry, etc.
- Free installer app for remote programming and diagnostics
- Illuminated call button and keypad
- · Works with an AT&T (4G or 3G) or T-Mobile Micro SIM card
- 2 Relays
- 24V dc power adapter included
- Model with video capability available

### **TECHNICAL SPECIFICATIONS**

Power supply	24 Vdc
Power consumption	80mA standby - 300mA during call - 2A peak
Modem models	3G or 4G USA
Dial out numbers	4
Permanent codes	200
Time restricted codes	20
Temporary codes	30
Automatic trigger events per week	40
Caller ID numbers	100
Time restricted caller ID numbers	20
Relays	2
Relays type	N/C and N/O
Relay Load	2A - 24Vac max
Operating ambient temperature	-22°F - 110°F (-30°C - +50°C)
Weight	4.7 lb ( 2.1 kg)
Dimensions (L x D x H)	9 x 7 x 3 ½ in (229 x 178 x 89 mm)
Protection class	IP 55
Enclosure	BS316 marine grade SS construction with gloss black face trim




### **INSTALLER APP**

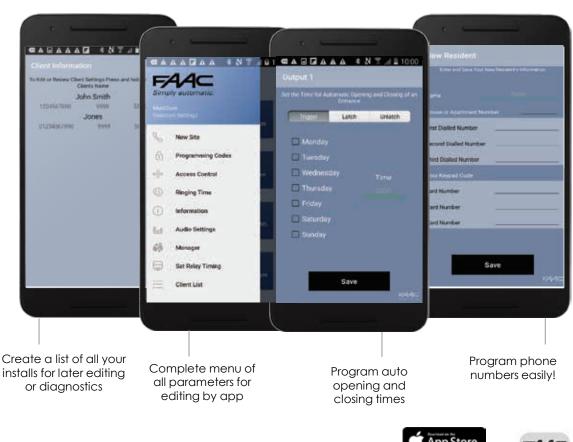

Google play



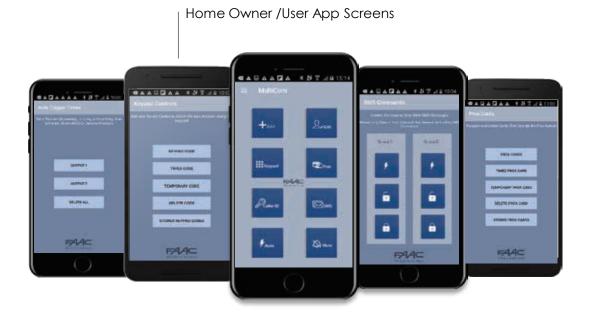

#### Allows to:


- Open / Close the gate
- Add Keypad codes
- Enable notifications
- Set Reset Auxiliary Outputs
- Program Do Not Disturb times
- and more...


## **VIDEO OPTION**


- Color camera, 110° view, 640x480 pixels
- Full streaming capability
- Infrared illumination for night vision
- Uplink bandwith 110 kbits/sec
- + 100 calls per  $\frac{1}{2}$  GB of data (based on 30 sec. calls)











Dimensions in inches

MODELS	
Part No.	
4300	
4400	
4401	

